


SWITCH COVER KIT

7600LT/8000LT Snowplows

PARTS LIST

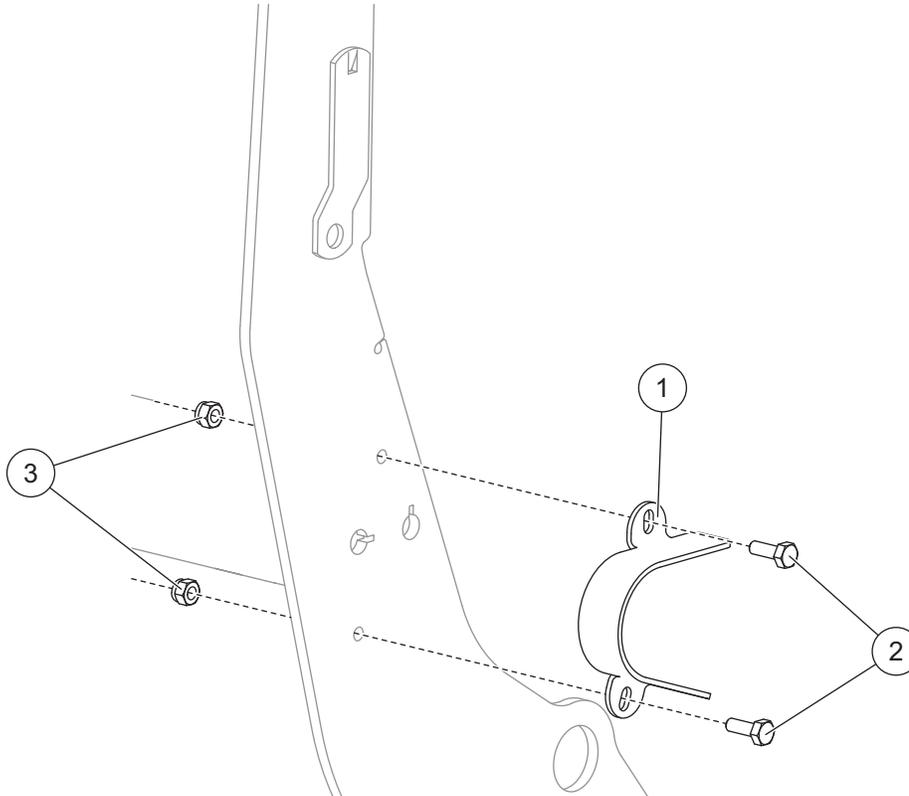

41074 Switch Cover Kit							
Item	Part	Qty	Description	Item	Part	Qty	Description
1		1	Switch Protector	3	91331	2	1/4-20 Hex Locknut GB Topping
2	90461	2	1/4-20 x 3/4 Hex Cap Screw G5				
ns = not shown				G = Grade			

⚠ CAUTION

Read this document before installing the Switch Cover Kit.

⚠ CAUTION

Use standard methods and practices when attaching snowplow and installing accessories including proper personal protective safety equipment.


INSTALLATION INSTRUCTIONS


1. Park the vehicle on a smooth, level, hard surface, such as concrete. Lower the blade to the ground and turn the control OFF. Disconnect the snowplow from the vehicle, or turn the vehicle ignition to the "OFF" position and remove the key.
2. Make a note of the hole where each switch is located. Remove both switches from the driver's side of the light tower.
3. Cut out the template on the following page and align the edges with the edges of the light tower and the filled areas with the switch holes. Secure with a piece of tape.
6. Reinstall the switches. The "Momentary ON, OFF, ON" switch, with the orange wire running to it, is mounted in the switch hole closest to the blade. The "Momentary ON, OFF, Momentary ON" switch, with the yellow wire running to it, is mounted in the switch hole farthest from the blade.
7. Align each switch alignment tab with the notch in each switch hole. Secure with a star washer and switch boot. Tighten until the switch is firmly in place.

⚠ CAUTION

Use caution not to pinch, cut or drill through any wires running along the light tower frame.

4. Center punch the upper and lower holes as indicated. Remove the template and drill one $17/64$ " hole at each marked point.
5. Align the switch cover with the holes and secure with $1/4$ " x $3/4$ " hex cap screw and $1/4$ " locknut. Torque fasteners to 9 ft-lb.

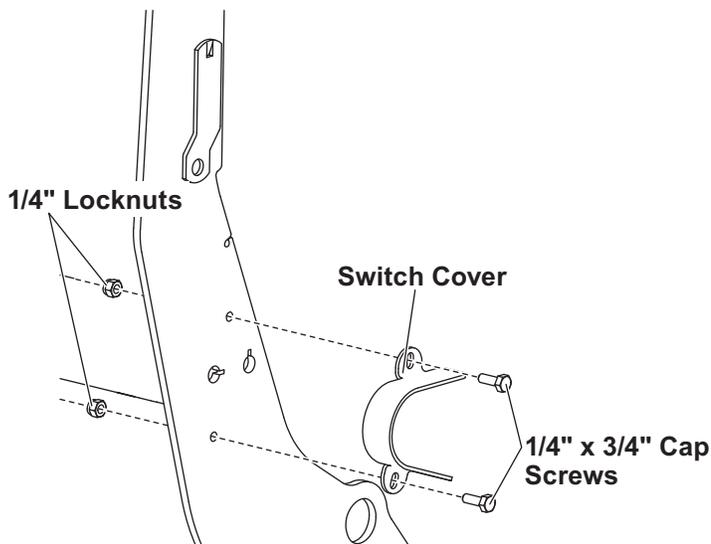

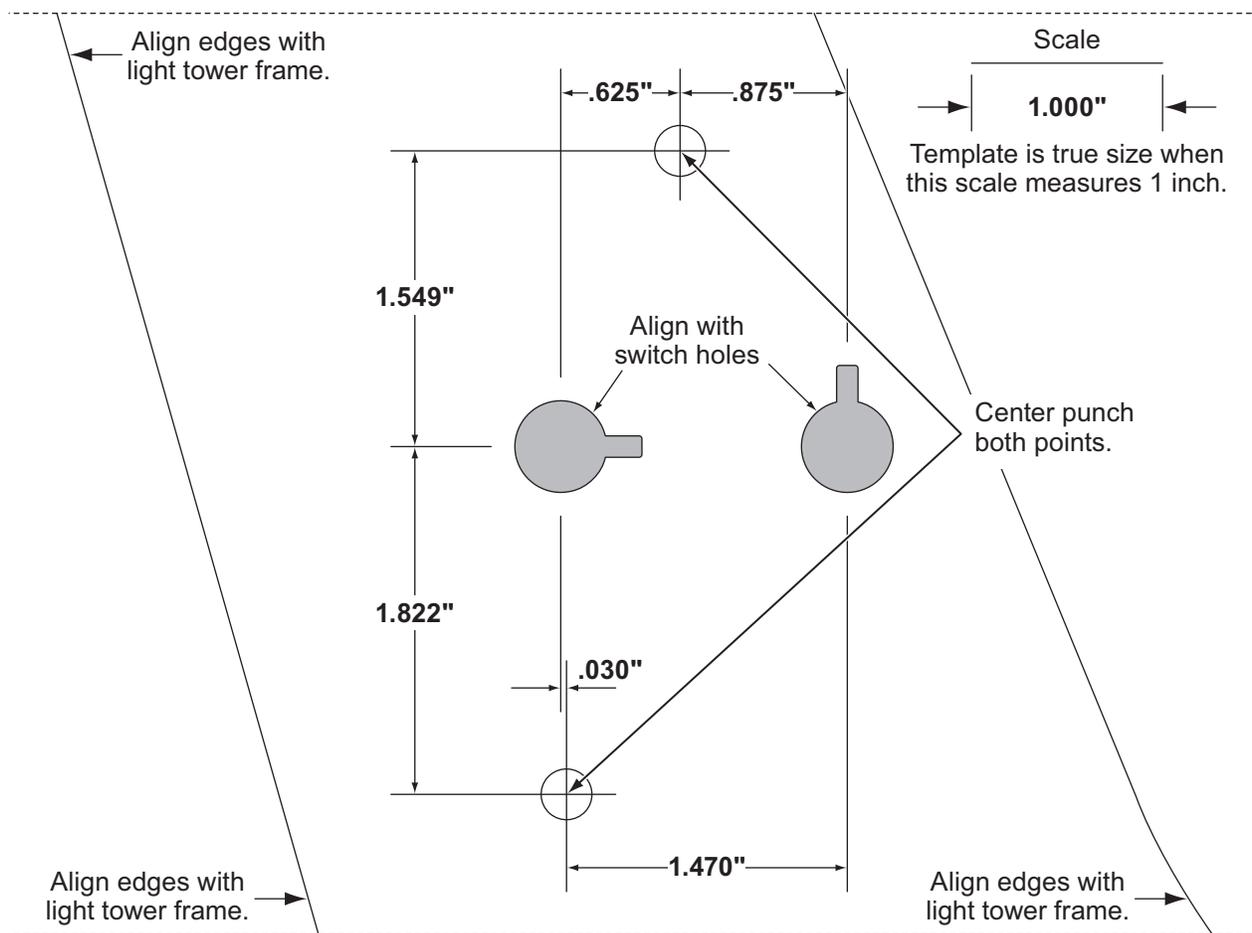

Copyright © 2009 Douglas Dynamics, L.L.C. All rights reserved. This material may not be reproduced or copied, in whole or in part, in any printed, mechanical, electronic, film or other distribution and storage media, without the written consent of Blizzard. Authorization to photocopy items for internal or personal use by the Blizzard outlets or snowplow owner is granted.

Blizzard reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Blizzard or the vehicle manufacturer may require or recommend optional equipment for snow removal. Do not exceed vehicle ratings with a snowplow. Blizzard offers a limited warranty for all snowplows and accessories. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, L.L.C.: BLIZZARD®.

Printed in U.S.A.
